

HAMMER DRIVE ANCHOR WITH NAIL

Hammer drive anchor, made from corrosion resistant zamak alloy.

TYPE HN



Frame fixings

ADVANTAGES

- Pre-assembled for quick and easy use.
- Hammer-in fixing, no setting tool needed.
-

FUNCTIONING

- Push-through installation.
- When hammered in, the plug will expand in 2 directions.
- For use in pre-drilled holes in solid materials.

INSLAGNAGEL

Zamac inslagnagel.

VOORDELEN

- Voorgemonteerd voor tijdsbesparing bij installatie.
- Eenvoudige installatie.
- Hittebestendig.

TOEPASSING

- Doorsteekmontage.
- De plug wordt door het aanbouwdeel gestoken en klemt zich tegen het boorgat wanneer de nagel wordt ingeslaan.
- Voor gebruik in volle bouwstoffen.

CHEVILLE À FRAPPER

Cheville à frapper en zamac.

AVANTAGES

- Le clou est prémonté dans la cheville pour un gain de temps de pose.
- Installation facile.
- Résistant à la chaleur.

APPLICATION


- Installation traversante.
- La cheville est installée en traversant la pièce à fixer et s'écarte dans le trou lorsque le clou est enfoncé.
- A utiliser dans des matériaux de base solides.

INSTALLATION SCHEME



INFO

d	l	d ₀	h ₁	d _k	h _{ef}	t _{fix}
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
5	22	5	37	10	15	7
6	30	6	45	13	20	10
6	40	6	55	13	20	20
6	50	6	65	13	20	30
6	65	6	80	13	20	45

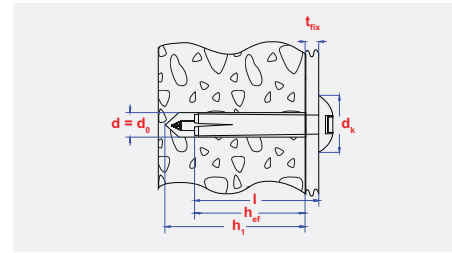


Frame fixings




Carton box packing - Kartonverpakking - Boîte carton



Window box packing - Vensterdoos - Boîte à fenêtre

size	pgb code	EAN13	
5x22	SM0HN305022 Z	5902134708553	200
6x30	SM0HN306030 Z	5902134708560	200
6x40	SM0HN306040 Z	5902134708577	200
6x50	SM0HN306050 Z	5902134708584	200
6x65	SM0HN306065 Z	5902134708591	200

size	pgb code	EAN13	
5x22	SM0HNE05022 Z	5902134705385	100
6x30	SM0HNE06030 Z	5902134705392	50
6x40	SM0HNE06040 Z	5902134705408	25
6x50	SM0HNE06050 Z	5902134705415	25
6x65	SM0HNE06065 Z	5902134705422	25

LOADS - BELASTINGEN - CHARGES

Recommended loads for a single anchor. ¹⁾

Maximaal aanbevolen belasting voor één anker.

Charges maximales recommandées pour un ancrage simple.

Type HN			ø 5	ø 6
Concrete / Beton / Béton	C20/25	[kN]	0,44	0,60
Solid brick / Volle baksteen / Brique pleine	≥ Mz 12	[kN]	0,40	0,45

¹⁾including / inclusief / inclusif safety factor 5.