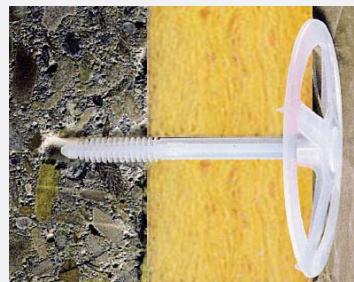


SM90N

PP
poly-propylene

INSULATION FIXING WITH SYNTHETIC NAIL

Insulation plug with 90mm disc suitable for all conventional insulation boards.

TYPE 90N**ADVANTAGES**

- The glass-fibre-reinforced plastic nail reduces the heat transmission.
- Simple hammer-in for quick installation.
- Low anchorage depth reduces the drilling depth.

FUNCTIONING

- Push-through installation.
- The plug will expand in when the nail is hammered-in.
- Non-bearing layers, such as adhesive and/or old render and plaster, must be included in the anchor's useful length.

ISOLATIEPLUG MET KUNSTSTOF NAGEL

Isolatieplug uit slagvast kunststof met schijf 90mm.

VOORDELEN

- De kunststof bevestiging voorkomt koudebruggen.
- Snelle en eenvoudige montage.
- Kleine verankeringsdiepte.

TOEPASSING

- Doorsteekinstallatie.
- De plug klemt zich tegen de boorwand wanneer de nagel wordt doorgeslagen.
- Niet-dragende lagen, zoals oud pleisterwerk, moeten worden meegeteld in de nuttige lengte.

FIXATION POUR ISOLANTS


Fixation pour isolants avec disque 90mm.

AVANTAGES

- Cheville en nylon réduit les ponts thermiques.
- Montage à impact rapide, facile et économique.
- Profondeur d'installation faible.


APPLICATION

- Installation traversante.
- Lorsque le clou est enfoncé, la cheville se fixe dans le trou.
- Les couches non-porteuses, comme les enduits anciens, doivent être inclus dans la longueur utile.

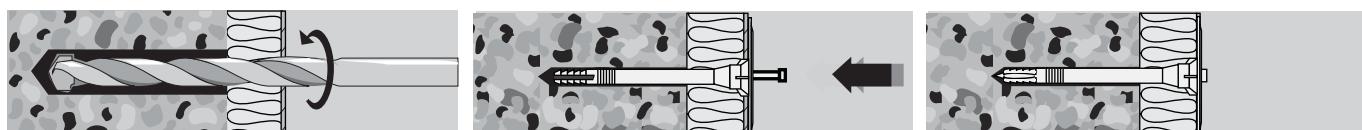INSTALLATION SCHEME

INFO

d [mm]	l [mm]	d_0 [mm]	h_1 [mm]	h_{ef} [mm]	t_{fix} [mm]
10	70	10	40	30	40
10	90	10	40	30	60
10	110	10	40	30	80
10	130	10	40	30	100
10	150	10	40	30	120
10	180	10	40	30	150
10	210	10	40	30	180

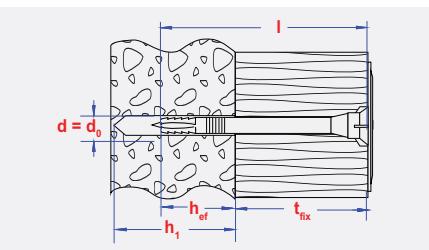

Carton box packing - Kartonverpakking - Boîte carton

size	pgb code	EAN13	
10x70	SM90N310070 N	5902134710167	250
10x90	SM90N310090 N	5902134710174	250
10x110	SM90N310110 N	5902134710181	250
10x130	SM90N310130 N	5902134710198	250
10x150	SM90N310150 N	5902134710204	150
10x180	SM90N310180 N	5902134710211	150
10x210	SM90N310210 N	5902134710228	100